

MERE - MODEL: ATL39

WAC LIGHTING

W Track Luminaires


PROJECT:

TYPE:

Product Image



Line Drawing

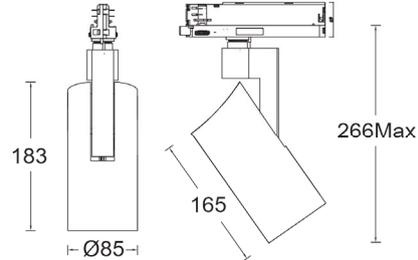

Product Description

MERE Smart Remote-Control Track Light Series is compatible with the WAC three-circuit track system and features a modern minimalist design — sleek, compact, and elegant, with no visible driver box. Its refined engineering seamlessly integrates advanced motor technology with CASAMBI control system, enabling remote operation for a more flexible and intuitive user experience. Equipped with a memory function, the system allows users to preset multiple positions and lighting scenes, delivering exceptional versatility for both architectural and technical lighting applications.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+Reflector
- Finish: Static electricity powder coating, BK/WT
- Adjustable Angle: Horizontal 0~365°, Vertical 0-90°
- Accessories: see attachment
- IP Rating: IP20
- Certification: CCC
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 1.9Kg without packing

Product Specifications

- LED Type: COB; 6° HP
- LED power: 20W/30W
- Source Lm: 3000K:20W 2400lm / 30W 3600lm
3500K:20W 2520lm / 30W 3780lm
4000K:20W 2640lm / 30W 3960lm
2700K-6000K:20W 2300lm / 30W 3450lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 3500K / 4000K, Ra90/Ra97(>Ra97)
- SDCM: 2 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: CASAMBI

Ordering model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ATL39S MERE	LD20 LED 20W	B Wireless	S 6°	9 90 A 97	27 2700K	WT White BK Black
	LM20 COB 20W		1 10°		30 3000K	
	LM30 COB 30W		2 24°		35 3500K	
			3 36°		40 4000K	
			F 10°- 50°		CC 2700K-6000K	

Example: ATL39SLM20-B2930WT