

SHINE PRO - MODEL: AEF3S

Flood Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

Product Image



Line Drawing

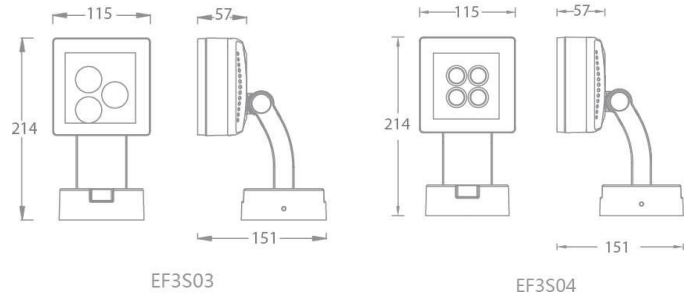

Product Description

SHINE PRO series is a professional LED floodlight designed by WAC for high-end outdoor lighting places. Carefully designed unique shape, all glass surface design, simple and generous, stylish and beautiful, more suitable for the current and future architectural trends. The luminaire is equipped with hidden light modular design; Full integration of aerodynamic principles, original optimal heat dissipation structure, enhance the heat dissipation performance of lamps, extend the service life of LED lamps; The vertical and horizontal direction can be adjusted accurately, while the head of the lamp can also be adjusted 0~90°, and the Angle locking structure is carefully designed to lock the adjustment of the projection direction; The SHINE PRO series of lamps is available in a variety of sizes and angles and powers, and the high display Ra90 can meet different lighting application solutions.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens optical system
- Finish: Static electricity powder coating
- Adjustable Angle: Vertical -30-150°, horizontal 0-355°
- Accessories: /
- Certification: CCC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- Lamp Power: 10W (Max)
- LED Type: HP LED
- Source Lm: 3000K 1100LM
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: MONO 2700K,3000K,4000K Ra90
RGBW W=3000K, RGBW W=4000K,
RGBW W=5700K
- SDCM: 3 SDCM (MONO), 5 SDCM (RGBW)
- Input: 220V AC
- Dimming: ON-OFF / DMX512
- Net Weight: 1.5Kg without packing

Order Model

Model	Power (W)	LEDs (quantity)	Controls	System	Beam	CCT	Max Lumens(lm)	Finish	
AEF3S03	08	8W(Max)	3	EL	ON-OFF	V 4°	27 2700K 30 3000K 40 4000K	526	BK Black
					220V AC Power Supply				
				ML	DMX512 Dimming				
				220V AC Power Supply					

Example: AEF3S03-08ELV27BK

SHINE PRO - MODEL: AEF3S

Flood Luminaires

WAC ARCHITECTURAL

PROJECT:

TYPE:



Model	Power (W)	LEDs (quantity)	Controls	System	Beam	CCT	Max Lumens(lm)	Finish
AEF3S04	10	10W(Max)	4	EL ON-OFF 220V AC Power Supply	S 6°	27	2700K	BK Black
					1 13°	30	3000K	
					2 20°	40	4000K	
					3 30°			
					J 8°*27°			

Example: AEF3S04-10ELS27BK


Model	Power (W)	LEDs (quantity)	Controls	System	Beam	CCT	Max Lumens(lm)	Finish
AEF3S04	10	10W(Max)	4	ML DMX512 Dimming 220V AC Power Supply	1 19°	F3	RGBW W=3000K	BK Black
					2 29°	F4	RGBW W=4000K	
					3 37°	F6	RGBW W=5700K	
					5 53°			
					F 23°X36°			

Example: AEF3S04-10ML1F3BK


Accessories

Model	Item	Description	Pic	Description Dimensions
AEF3S-WW1-BK	Wall Washer Visor	WW1		

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

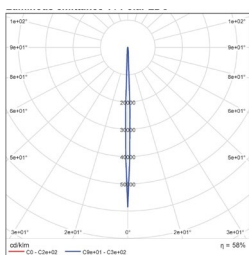

MODEL: AEF3S03-08EL-V30BK
BEAM ANGLE: 4°
POWER: 10.6W
LUMENS: 525.6 lm
CBCP: /
EFFICACY: 49.4 lm/W




MODEL: AEF3S04-10EL-S30BK
BEAM ANGLE: 6°
POWER: 13.5 W
LUMENS: 812 lm
CBCP: /
EFFICACY: 60.2 lm/W

SHINE PRO - MODEL: AEF3S


Flood Luminaires

PROJECT:


TYPE:




MODEL: AEF3S04-10EL-130BK
BEAM ANGLE: 13°
POWER: 13.5 W
LUMENS: 757.4 lm
CBCP: /
EFFICACY: 56 lm/W




MODEL: AEF3S04-10EL-230BK
BEAM ANGLE: 20°
POWER: 13.6 W
LUMENS: 768 lm
CBCP: /
EFFICACY: 56.89 lm/W




MODEL: AEF3S04-10EL-330BK
BEAM ANGLE: 30°
POWER: 13.5 W
LUMENS: 757 lm
CBCP: /
EFFICACY: 56.15 lm/W




MODEL: AEF3S04-10EL-J30BK
BEAM ANGLE: 8°*27°
POWER: 13.5 W
LUMENS: 787 lm
CBCP: /
EFFICACY: 58.51 lm/W




MODEL: AEF3S04-10ML-1F3BK
BEAM ANGLE: 19°
POWER: 10.2 W
LUMENS: 243 lm
CBCP: /
EFFICACY: 23.9 lm/W



MODEL: AEF3S04-10ML-2F3BK
BEAM ANGLE: 29°
POWER: 10.1 W
LUMENS: 253 lm
CBCP: /
EFFICACY: 25 lm/W



MODEL: AEF3S04-10ML-3F3BK
BEAM ANGLE: 37°
POWER: 10.2 W
LUMENS: 305 lm
CBCP: /
EFFICACY: 30 lm/W



MODEL: AEF3S04-10ML-5F3BK
BEAM ANGLE: 53°
POWER: 10.2 W
LUMENS: 240 lm
CBCP: /
EFFICACY: 23.6 lm/W