

Volta

Static White - 4.5" Downlight


R4RD2T | R4RD2L | R4SD2T | R4SD2L

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____




LINE DRAWING

TRIM



TRIMLESS



PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications. A built-in field selectable light engine height allows for a cut-off angle adjustment of 30-34°.

SPECIFICATIONS

Construction:	Durable die-cast self flanged aluminum construction
Mounting:	Heavy gauge retention clips support trim firmly Ceiling cut out (Round): Trim \varnothing 5 $\frac{1}{8}$ " \bigcirc Trimless \varnothing 5 $\frac{1}{8}$ " \bigcirc Ceiling cut out (Square): Trim 5 $\frac{1}{8}$ " x 5 $\frac{1}{8}$ " \square Trimless 5 $\frac{1}{8}$ " x 5 $\frac{1}{8}$ " \square Accommodates ceiling thickness of 1/2" - 1 1/2"
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Dimming:	0-10V: 100-0% Electronic Low Voltage (ELV): 100-5%
Maximum Delivered Intensity:	Up to 12,824 cd (Square Spot 15°, 4000K, CRI 85)
Maximum Delivered Output:	Up to 3,585 lm (Square Narrow Flood 25°, 4000K, CRI 85)
Standards:	ETL & cETL Wet location listed, Title 24 JA8 Compliant
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Model	Beam	Lumens	Ref Output*		Lumens/Watt	Color Temp	CRI	
			CBCP					
R4RD2T R4RD2L	S 15°	Round	1405	11420	65	827 - 2700K	85	
		Square	1440	11985	66			
	N 25°	Round	3145	9615	94			830 - 3000K
		Square	3350	9820	99			835 - 3500K
R4SD2T R4SD2L	F 45°	Round	3025	5005	90	840 - 4000K	85	
		Square	3200	4935	95			927 - 2700K
	W 60°	Round	2895	3125	85	930 - 3000K	90	
		Square	3060	3055	90			

Lumens and CBCP are reference values for 3000K Color Temperature and 85 CRI with 36 housing. Refer to Multiplier Table in Performance Data to determine other outputs.

Volta

Static White - 4.5" Downlight

R4RD2T | R4RD2L | R4SD2T | R4SD2L

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

Model & Power	Beam	Color Temperature & CRI	Reflector Finish	Trim Finish
R4RD2T	S: Spot - 15°	827 - 2700K - 85	BK - BLACK	WT - WHITE
R4SD2T	N: Narrow Flood - 25°	830 - 3000K - 85	CB - COPPER	
R4RD2L	F: Flood - 45°	835 - 3500K - 85	HZ - HAZE	
R4SD2L	W: Wide Flood - 60°	840 - 4000K - 85	WT - WHITE	
		927 - 2700K - 90		
		930 - 3000K - 90		

R4RD2T-____-__ Example: R4RD2T-N840-WT

HOUSINGS (Required)								
Model	Trim	Power	S	N,F,W	Rating	Driver	Emergency Backup	
New Construction Airtight	R4RN (Round) R4SN (Square)	T Trim L Trimless	15	10W	15W	IC	DEFAULT ELV, 0-10V	EM
			25	15W	23W	IC		
			36	22W	34W	Non-IC		
New Construction Airtight Chicago Plenum	R4RC (Round) R4SC (Square)	T Trim L Trimless	15	10W	15W	IC	DEFAULT ELV, 0-10V	EM
			25	15W	23W	IC		
			36	22W	34W	Non-IC		
Remodel Round or Square	R4BR	T Trim	15	10W	15W	Non-IC	DEFAULT ELV, 0-10V	N/A
			25	15W	23W	Non-IC		
			36	22W	34W	Non-IC		
Remodel	R4RR (Round) R4SR (Square)	L Trimless	15	10W	15W	Non-IC	DEFAULT ELV, 0-10V	N/A
			25	15W	23W	Non-IC		
			36	22W	34W	Non-IC		

ACCESSORIES			
LENS-73-HLD	Accessory Holder	LENS-73-GRN	Green Lens
LENS-73-HCM	Honeycomb Louver	LENS-73-RED	Red Lens
LENS-73-CRL	Cross Louver	LENS-73-FR	Frosted Lens
LENS-73-SNOOT	Snoot	LENS-73-SPR	Spread Lens
LENS-73-AMB	Amber Lens	LENS-73-BEL	Beam Elongating Lens
LENS-73-BLU	Blue Lens		

FIELD REPLACEABLE DRIVER	
D-R4N-15	Driver for 15W New Construction Housing
D-R4N-25	Driver for 23W New Construction Housing
D-R4N-36	Driver for 34W New Construction Housing

INTERCHANGEABLE REFLECTORS	
REF-R4-N	Narrow Flood Beam
REF-R4-F	Flood Beam
REF-R4-W	Wide Beam

ORDERING NOTES
1. The "White" trim finish is only available with the reflector finishes "Black" and "Haze".
2. Trimless fixtures cannot be ordered with a trim finish.
3. The "Spot - 15°" beam angle is available in 10W, 15W, and 22W.
4. The "Narrow Flood - 25°", "Flood - 45°", "Wide Flood - 60°" beam angles are available in 15W, 23W, and 34W.

wacarchitectural.com | WAC Architectural, a WAC Group brand.

WAC Group Headquarters
44 Harbor Park Drive
Port Washington, NY 11050

WAC Architectural
Phone (800) 526.2588
Fax (800) 526.2585

APR 2026 | P. 2 of 4

WAC GROUP

Volta

Static White - 4.5" Downlight

R4RD2T | R4RD2L | R4SD2T | R4SD2L

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____


PERFORMANCE DATA

Polar Candela Distribution Charts


Samples shown with a 22W/34W (depending on beam angle) fixture set to 3000K and 90 CRI.

ROUND

Spot Beam: 15° Beam

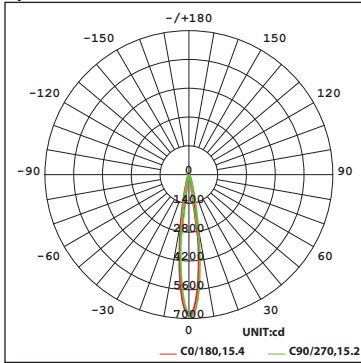


Wide Flood Beam: 60° Beam

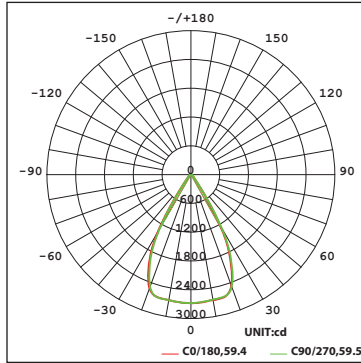


SQUARE


Spot Beam: 15° Beam

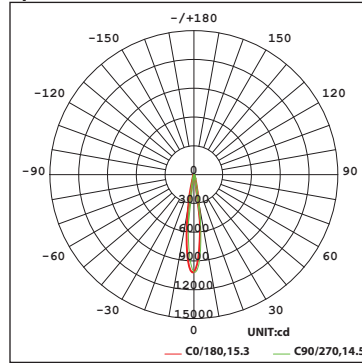


Wide Flood Beam: 60° Beam

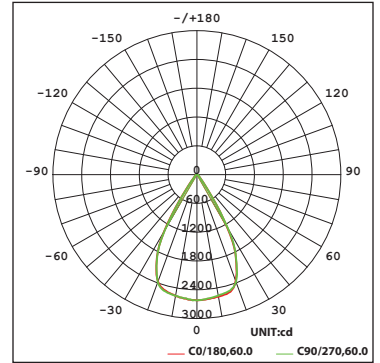


Narrow Flood Beam: 25° Beam

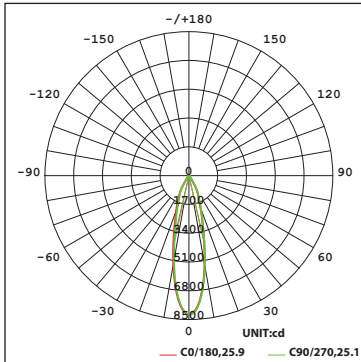


Narrow Flood Beam: 25° Beam

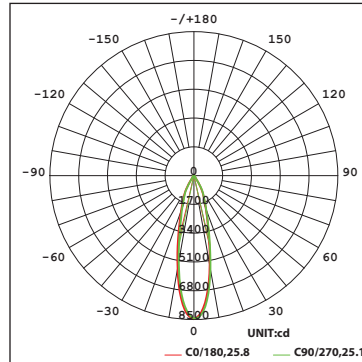

Flood Beam: 45° Beam

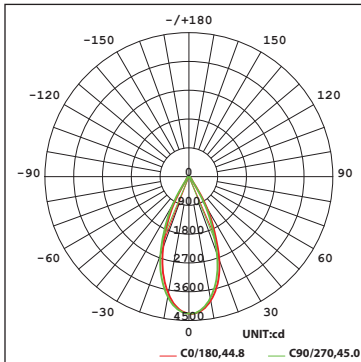

Flood Beam: 45° Beam

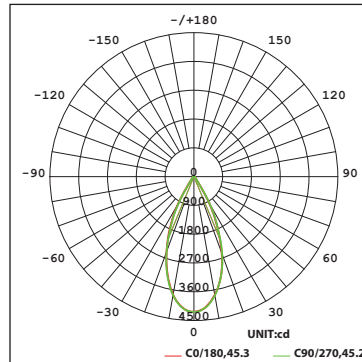

Volta

Static White - 4.5" Downlight

R4RD2T | R4RD2L | R4SD2T | R4SD2L

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated at 3000K and 90 CRI.

Round Fixture	Angle	UGR Range
Spot	15°	≤18
Narrow Flood	25°	≤12
Flood	45°	≤14
Wide Flood	60°	≤13

Square Fixture	Angle	UGR Range
Spot	15°	≤16
Narrow Flood	25°	≤12
Flood	45°	≤13
Wide Flood	60°	≤15

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Multiplier		TRIM					
		827	927	830	930	835	840
HOUSING	36	0.95	0.81	1.00	0.86	1.05	1.07
	25	0.66	0.56	0.69	0.59	0.73	0.74
	15	0.43	0.37	0.45	0.39	0.48	0.49