

LEDME - MODEL: AWL300

Step And Wall Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

Product Image



Line Drawing

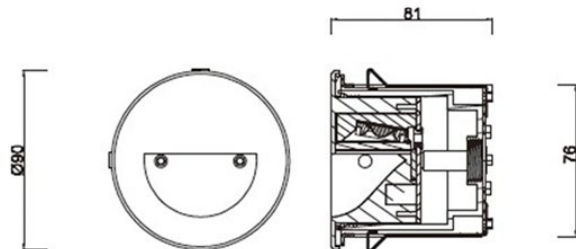

Product Description

Designed to accentuate the aesthetics of the building, the LEDme® luminaires are designed to blend seamlessly into the wall. Efficient energy savings and optimized light output increase the safety and style of the staircase, maintaining minimal glare on the walls and walkways. IP66 enables both indoor and outdoor lighting solutions in wet locations. 220V/AC direct wiring available: Available in white.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: /
- Finish: Static electricity power coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP66
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- Opening size: Φ 82mm
- LED Type: SMD
- Power: 22W
- Source Lm: 2700K 180lm/3000K 190lm/4000K 200lm
- LED Lifetime: >40000h-L70 / B10-Ta25°C(LM-80 / TM-21)
- CCT/CRI: 700K,Ra80;3000K,Ra80; 4000K,Ra80
- SDCM: 3SDCM
- Input: 20V/AC, 50 / 60Hz
- Dimming: ON-OFF
- Net Weight: 0.39Kg without packing

Order Model

Model	Power (W)	Mx Lumens (Lm)	Control Systems	CCT	Finish
AWL300	LD05 3.9W	74	E ON-OFF 220V/AC Power Supply	27 2700K	WT White
				30 3000K	BK Black
				40 4000K	BZ Bronze
					BN Brushed Nickel

Example: AWL300-LD05E30WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

LEDME - MODEL: AWL300

Step And Wall Luminaires


WAC ARCHITECTURAL

PROJECT:

TYPE:

Accessory

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

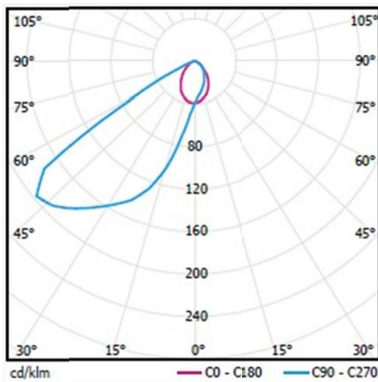

MODEL: AWL300-LD05E30WT

BEAM ANGLE: /

POWER: 3.2W

LUMENS: 56lm

CBCP: /

EFFICACY: 18 lm/W