

## Volta

### Static White - 2" Shallow Regressed Downlight


R2RD1T | R2SD1T

Fixture Type: \_\_\_\_\_


Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

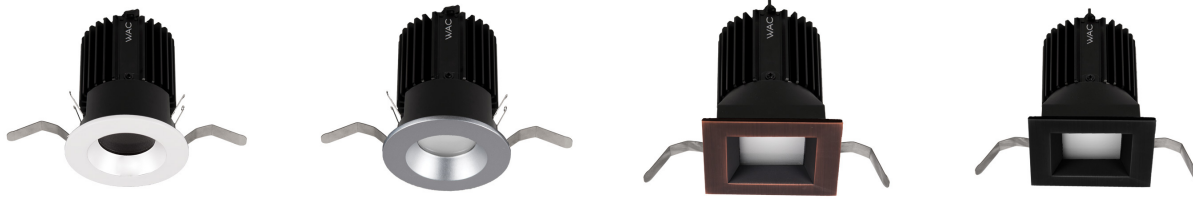

#### LINE DRAWING



#### PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications.

#### SPECIFICATIONS

<b>Construction:</b>	Durable die-cast self flanged aluminum construction
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly Ceiling cut out (Round): Trim $\varnothing$ $3\frac{9}{16}$ " Trimless $\varnothing$ $4\frac{1}{4}$ " Ceiling cut out (Square): Trim $3\frac{9}{16}$ " x $3\frac{9}{16}$ " Trimless $4\frac{1}{4}$ " x $4\frac{1}{4}$ " Accommodates $\frac{1}{2}$ " - $1\frac{1}{2}$ " ceiling thickness
<b>Light Source:</b>	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
<b>Input:</b>	Universal 120-277V AC, 50/60 Hz
<b>Dimming:</b>	0-10V: 100-0% Electronic Low Voltage (ELV): 100-5%
<b>Maximum Delivered Intensity:</b>	Up to 6,575 cd (Round Narrow Flood 25°, 4000K, CRI 85)
<b>Maximum Delivered Output:</b>	Up to 1,584 lm (Square Flood 40°, 4000K, CRI 85)
<b>Standards:</b>	ETL & cETL Wet location listed, Title 24 JA8 Compliant
<b>Warranty:</b>	5 year WAC Lighting guaranteed warranty

#### BEAM ANGLES



S - 12°



N - 25°



F - 40°



W - 60°

#### FINISHES



Black  
BK



Copper Bronze  
CB



Haze  
HZ



White  
WT



Black White  
BKWT



Haze White  
HZWT

Model	Beam	Lumens	CBCP	Color Temp	CRI	
		Ref Output*				
R2RD1T Round R2SD1T Square	S 12°	Round	395	5910	<b>827 - 2700K</b>	85
		Square	420	6085		
	N 25°	Round	1255	5380	<b>830 - 3000K</b>	85
		Square	1460	6145		
	F 40°	Round	1270	3085	<b>840 - 4000K</b>	85
		Square	1480	3315		
	W 60°	Round	905	1020	<b>927 - 2700K</b>	90
		Square	1075	1035		
				<b>930 - 3000K</b>	90	

Lumens and CBCP are reference values for 3000K Color Temperature and 85 CRI with 22 housing. Refer to Multiplier Table in Performance Data to determine other outputs.

## Volta

### Static White - 2" Shallow Regressed Downlight

R2RD1T | R2SD1T

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Power	Beam	Color Temperature & CRI	Reflector Finish	Trim Finish
<b>R2RD1T</b> <b>R2SD1T</b>	<b>S:</b> Spot - 12°	<b>827</b> - 2700K - 85	<b>BK</b> - BLACK	<b>WT</b> - WHITE
	<b>N:</b> Narrow Flood - 25°	<b>830</b> - 3000K - 85	<b>CB</b> - COPPER	
	<b>F:</b> Flood - 40°	<b>835</b> - 3500K - 85	<b>HZ</b> - HAZE	
	<b>W:</b> Wide Flood - 60°	<b>840</b> - 4000K - 85	<b>WT</b> - WHITE	
		<b>927</b> - 2700K - 90		
		<b>930</b> - 3000K - 90		

**R2RD1T-\_\_\_-\_\_\_** Example: R2RD1T-N840-WT

HOUSINGS (Required)								
Model	Trim	Power	S	N,F,W	Rating	Driver	Emergency Backup	
New Construction Airtight	<b>R2RN</b> (Round)	<b>T</b> <i>Trim</i>	<b>15</b>	<i>10W</i>	<i>15W</i>	<i>IC</i>	<b>DEFAULT</b> <i>ELV, 0-10V</i>	<b>EM</b> <i>Optional</i>
	<b>R2SN</b> (Square)	<b>L</b> <i>Trimless</i>	<b>22</b>	<i>15W</i>	<i>22W</i>	<i>IC</i>		
New Construction Airtight Chicago Plenum	<b>R2RC</b> (Round)	<b>T</b> <i>Trim</i>	<b>15</b>	<i>10W</i>	<i>15W</i>	<i>IC</i>	<b>DEFAULT</b> <i>ELV, 0-10V</i>	<b>EM</b> <i>Optional</i>
	<b>R2SC</b> (Square)	<b>L</b> <i>Trimless</i>	<b>22</b>	<i>15W</i>	<i>22W</i>	<i>IC</i>		
Remodel Round or Square	<b>R2BR</b>	<b>T</b> <i>Trim</i>	<b>15</b>	<i>10W</i>	<i>15W</i>	<i>Non-IC</i>	<b>DEFAULT</b> <i>ELV, 0-10V</i>	<b>N/A</b>
			<b>22</b>	<i>15W</i>	<i>22W</i>	<i>Non-IC</i>		
Remodel	<b>R2RR</b> (Round) <b>R2SR</b> (Square)	<b>L</b> <i>Trimless</i>	<b>15</b>	<i>15W</i>	<i>15W</i>	<i>Non-IC</i>	<b>DEFAULT</b> <i>ELV, 0-10V</i>	<b>N/A</b>
			<b>22</b>	<i>22W</i>	<i>22W</i>	<i>Non-IC</i>		

ACCESSORIES	
LENS-16-HLD <i>Accessory Holder</i>	LENS-16RED <i>Red Lens</i>
LENS-16HCM <i>Honeycomb Louver</i>	LENS-16FR <i>Frosted Lens</i>
LENS-16CRL <i>Cross Louver</i>	LENS-16SPR <i>Spread Lens</i>
LENS-16AMB <i>Amber Lens</i>	LENS-16BEL <i>Beam Elongating Lens</i>
LENS-16BLU <i>Blue Lens</i>	
LENS-16GRN <i>Green Lens</i>	

CEILING ADAPTERS	
R2R-ADP1	<i>Round - ½" to 1" ceiling thickness</i>
R2R-ADP2	<i>Round - 1" to 1½" ceiling thickness</i>
R2S-ADP1	<i>Square - ½" to 1" ceiling thickness</i>
R2S-ADP2	<i>Square - 1" to 1½" ceiling thickness</i>

INTERCHANGEABLE REFLECTORS	
REF-R2-N	<i>Narrow Flood Beam</i>
REF-R2-F	<i>Flood Beam</i>
REF-R2-W	<i>Wide Beam</i>

### ORDERING NOTES

- The "White" trim finish is only available with the reflector finishes "Black" and "Haze".
- The "Spot - 12°" beam angle is available in 10W and 15W.
- The "Narrow Flood - 25°", "Flood - 40°", and "Wide Flood - 60°" beam angles are available in 15W and 22W.

wacarchitectural.com | WAC Architectural, a WAC Group brand.

WAC Group Headquarters  
44 Harbor Park Drive  
Port Washington, NY 11050

WAC Lighting  
Phone (800) 526.2588  
Fax (800) 526.2585

APR 2026 | P. 2 of 4

WAC GROUP

# Volta

## Static White - 2" Shallow Regressed Downlight

R2RD1T | R2SD1T

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_


### PERFORMANCE DATA

#### Polar Candela Distribution Charts


Samples shown with a 22W fixture set to 3000K and 90 CRI.

#### ROUND

Spot Beam: 12° Beam

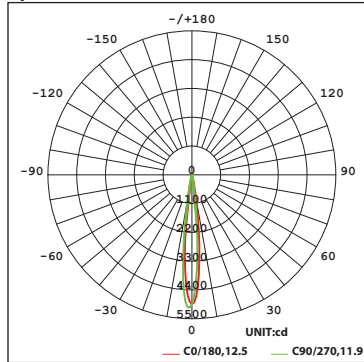


Wide Flood Beam: 60° Beam

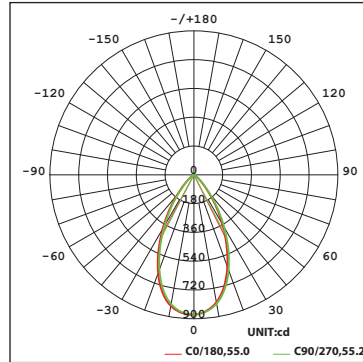


#### SQUARE


Spot Beam: 12° Beam

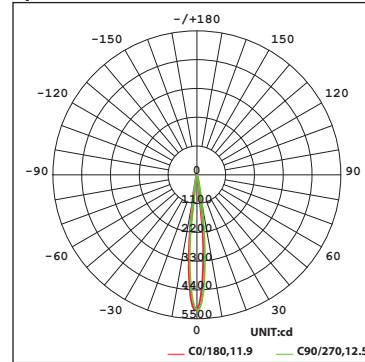


Wide Flood Beam: 60° Beam

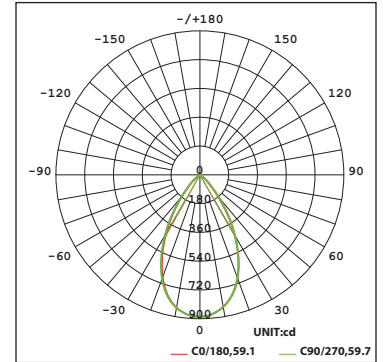


Narrow Flood Beam: 25° Beam

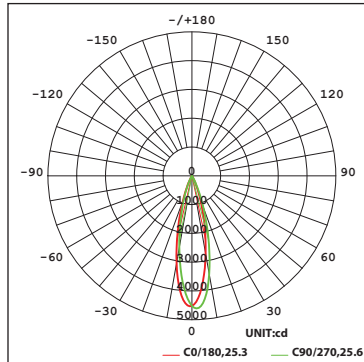


Narrow Flood Beam: 25° Beam

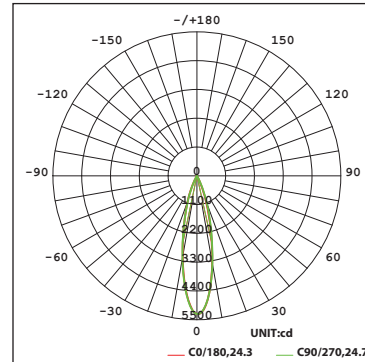

Flood Beam: 40° Beam

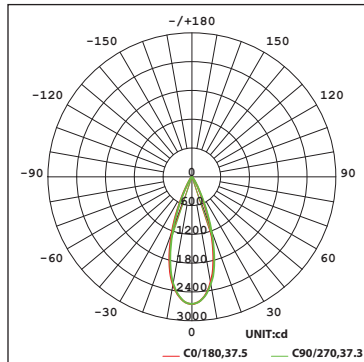

Flood Beam: 40° Beam

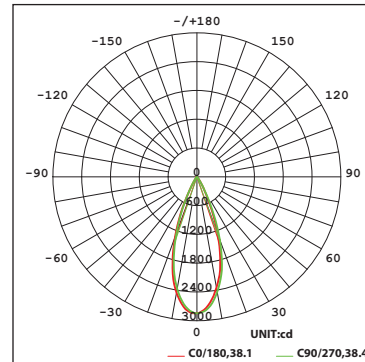

## Volta

### Static White - 2" Shallow Regressed Downlight

R2RD1T | R2SD1T

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

## PERFORMANCE DATA

### Unified Glare Rating (UGR) Table

UGR values shown are calculated for a Round Trim fixture with a 15W Spot Beam (12°) optic at 3000K and 90 CRI. General performance of other beam angles shown below.

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
<b>x = 2H y = 2H</b>										
2H	2.9	3.5	3.1	3.6	3.8	3.5	4.1	3.7	4.2	4.3
3H	3.0	3.5	3.2	3.6	3.8	3.5	4.0	3.8	4.2	4.4
4H	2.9	3.4	3.2	3.6	3.8	3.5	4.0	3.8	4.2	4.4
6H	2.9	3.4	3.2	3.6	3.8	3.5	3.9	3.7	4.2	4.4
8H	2.9	3.3	3.2	3.6	3.8	3.4	3.9	3.7	4.1	4.4
12H	2.8	3.3	3.1	3.5	3.8	3.4	3.8	3.7	4.1	4.4
<b>4H</b>										
2H	2.8	3.3	3.1	3.5	3.7	3.4	3.9	3.7	4.1	4.3
3H	2.9	3.3	3.2	3.6	3.8	3.5	3.9	3.8	4.2	4.4
4H	2.9	3.3	3.2	3.6	3.9	3.5	3.9	3.8	4.2	4.5
6H	2.9	3.2	3.2	3.5	3.9	3.4	3.8	3.8	4.1	4.4
8H	2.8	3.2	3.2	3.5	3.9	3.4	3.7	3.8	4.1	4.4
12H	2.8	3.1	3.2	3.5	3.9	3.3	3.6	3.7	4.0	4.4
<b>8H</b>										
4H	2.8	3.1	3.2	3.5	3.8	3.4	3.7	3.7	4.0	4.4
6H	2.8	3.0	3.2	3.4	3.8	3.3	3.6	3.7	4.0	4.4
8H	2.7	3.0	3.2	3.4	3.8	3.3	3.5	3.7	3.9	4.4
12H	2.7	2.9	3.2	3.4	3.8	3.2	3.4	3.7	3.9	4.3
<b>12H</b>										
4H	2.7	3.0	3.1	3.4	3.8	3.3	3.6	3.7	4.0	4.4
6H	2.7	3.0	3.1	3.4	3.8	3.2	3.5	3.7	3.9	4.3
8H	2.7	2.9	3.2	3.3	3.8	3.2	3.4	3.7	3.9	4.3

Round Fixture	Angle	UGR Range
Spot	12°	≤5
Narrow Flood	25°	≤3
Flood	40°	≤6
Wide Flood	60°	≤15

Square Fixture	Angle	UGR Range
Spot	12°	≤5
Narrow Flood	25°	≤3
Flood	40°	≤6
Wide Flood	60°	≤16

### Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Multiplier	TRIM					
	827	927	830	930	835	840
<b>HOUSING</b>						
22	0.95	0.81	1.00	0.86	1.05	1.07
15	0.66	0.56	0.69	0.59	0.72	0.74