

OCULARC - MODEL: AME48S/ASR48S

Surface Mounted Luminaires

WAC


PROJECT :

TYPE :

Product Image



Line Drawing

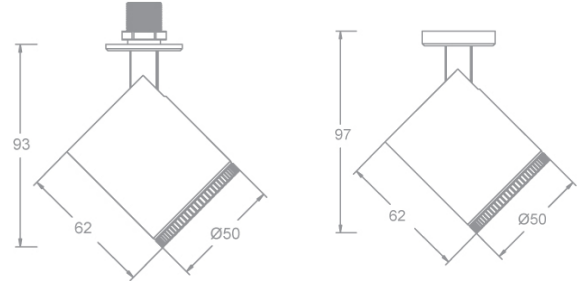

SR48S

ME48S

Product Description

The Ocularc series surface mounted lamps can be selected for either hole embedded installation or surface magnetic suction installation, making the lamps flexible and compact; Adopting WAC's leading SUBOROSA dimming technology with a built-in 30 ° anti glare angle, achieving the ultimate anti glare effect; Provide 4 fixed angle options to meet the needs of different application environments, which can be widely used in museum and art museum display cabinet spaces.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+ SUBOROSA optical system
- Finish: Static electricity powder coating
- Adjustable Angle: 0-360°Horizontal 0-90°Vertical
- Accessories: As attached
- Certification: CQC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: SR48S corresponds to the opening Ø17
Ceiling 1mm~15mm ;ME48S magnetic suction
- LED Type: HP LED
- Led power: 10W
- Source Lm: 3000K 950LM; 4000K 1000LM;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K , Ra90 and Ra97(> Ra95)
- SDCM: 3 SDCM
- Input: Constant current 800mA max
- Dimming: External drive
- Net Weight: 0.2Kg without packing

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
AME48S	LD10 LED 10W	N Single wire *	1 15°	9 90 A 97	30 3000K 40 4000K	BK Black
ASR48S						
Ocularc						
6 60°						
AME48S	LD10	N	2	9	30	BK

Example : AME48SLD10-N2930BK

Note: Except for the 15 ° built-in honeycomb, the rest do not include honeycomb;

*The lighting fixtures do not include driving appliances and need to be ordered separately (the dimming method is determined by the appliances).
The exposed wire of the original lighting fixture is about 0.5m long

OCULARC - MODEL: AME48S/ASR48S

Surface Mounted Luminaires



PROJECT :

TYPE :

Accessory


ALD-070MA14D-LF-C

Special electrical appliances: Input 220V~240VAC/50Hz, output 700mA (power 9W), 8-12V Supports 0-10V dimming and can drive 1 display cabinet light
size (L*W*H) : 115*43*25 , mm




Note: Electrical appliances need to be ordered separately, excluding wires


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL : ASR48SLD10-N1930BK
BEAM ANGLE : 15°
POWER : 10W
LUMENS : 397lm
CBCP : 3556cd
EFFICACY : 35lm/W



MODEL : ASR48SLD10-N2930BK
BEAM ANGLE : 24°
POWER : 10W
LUMENS : 471lm
CBCP : 2018cd
EFFICACY : 47lm/W



MODEL : ASR48SLD10-N3930BK
BEAM ANGLE : 36°
POWER : 10W
LUMENS : 427lm
CBCP : 953cd
EFFICACY : 43lm/W



MODEL : ASR48SLD10-N6930BK
BEAM ANGLE : 60°
POWER : 10W
LUMENS : 402lm
CBCP : 418cd
EFFICACY : 40lm/W