
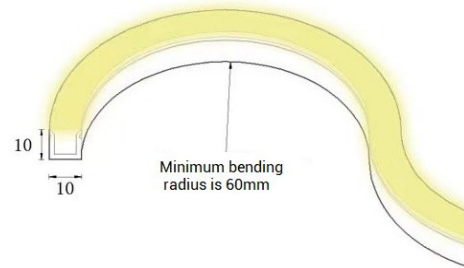


PROJECT:

TYPE:

**Product Image**

**Line Drawing**

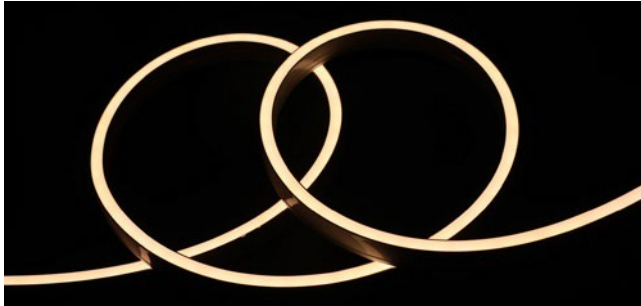

**Product Description**

The 10 \* 10 mm side bend neon light strip adopts a special process of integrated extrusion, ensuring continuous and uniform light output without any spots. The integrated end is injection molded and supports seamless splicing without dark areas. There are two specifications, IP65 and IP67, Widely used in indoor and outdoor contouring and shaping.

**Product Features**

- Body Material: Integrated extruded silicone lamp body, high-quality FPCB lamp board
- Optical System: Silicone microstructure
- Accessories: Installation accessories can be ordered separately
- Certification: CQC
- IP Rating: IP65(Bare wires at both ends)  
IP67(Waterproof joints at both ends)
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

**Product Specifications**

- LED Type: SMD
- Light power: 690lm@6w/m, 1150lm@10W/m
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K,3000K,3500K,4000K,5000K/Ra90
- Input: 24V DC
- SDCM: 3 SDCM
- Bending radius: 60mm (minimum)
- Dimming: ON-OFF (Whole segment control)
- Product weight: About 0.3kg/m, excluding packaging

**Order Model**

Model	LED	Length	Size	Dimming	CCT	Power Feed Type	IP	Finish
<b>AFLSV</b> V-series side bend neon light strip	<b>06</b> 6W/m  <b>10</b> 10W/m	<b>10</b> 1m	<b>A</b>  10*10mm	<b>E</b> ON-OFF  (Whole segment control)	<b>27</b> 2700K	<b>S</b> Side  <b>B</b> Bottom  <b>F</b> Front	<b>5</b> IP65  <b>7</b> IP67	<b>WT</b> White
		<b>20</b> 2m			<b>30</b> 3000K			
		<b>30</b> 3m			<b>35</b> 3500K			
		<b>40</b> 4m			<b>40</b> 4000K			
		<b>50</b> 5m			<b>50</b> 5000K			

Example: AFLSV-0610AE30S5WT

**NOTE:** The length can be provided in units of 0.1 meters, for example: AFLSV-0615AE30S5WT ("15" represents 1.5 meters)



**NEON - MODEL: AFLSV**  
Linear Luminaires

**WAC ARCHITECTURAL**

PROJECT:

TYPE:

**Accessories**

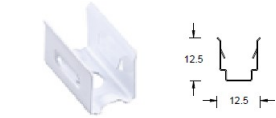Part Number	Description	Picture
AFLSH-A-AC	H-series 10 * 10mm Special Card * Default 1M comes with 3pcs of cards	
AFLSH-A-CH	H-series 10 * 10mm dedicated fixed track length 965mm * Optional, needs to be ordered separately	

**NEON - MODEL: AFLSV**  
Linear Luminaires



WAC ARCHITECTURAL

PROJECT:

TYPE:

**Product Image**

**Line Drawing**

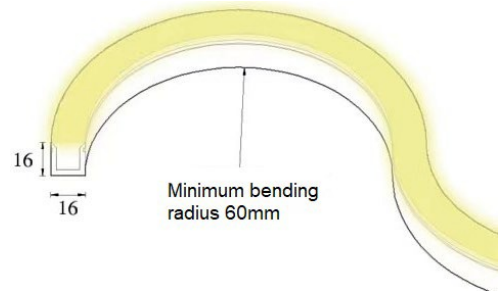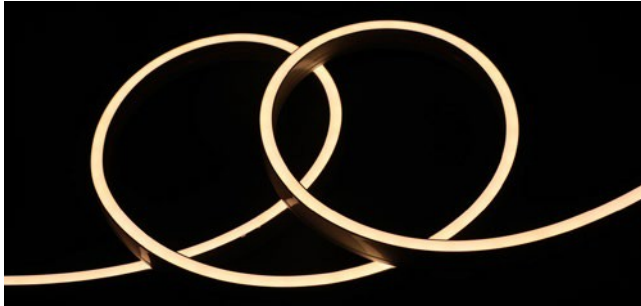

**Product Description**

The 16 \* 16 mm side bend neon light strip adopts a special process of integrated extrusion, there are monochrome and RGBW versions available, ensuring continuous and uniform light output without any spots. The integrated end is injection molded and supports seamless splicing without dark areas. There are two specifications, IP65 and IP67, Widely used in indoor and outdoor contouring and shaping.

**Product Features**

- Body Material: Integrated extruded silicone lamp body, high-quality FPCB lamp board
- Optical System: Silicone microstructure
- Accessories: Installation accessories can be ordered separately
- Certification: CQC
- IP Rating: IP65(Bare wires at both ends)  
IP67(Waterproof joints at both ends)
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

**Product Specifications**

- LED Type: SMD
- Light power: 1610lm@14w/m, 2070lm@18W/m
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K,3000K,3500K,4000K,5000K/Ra90  
RGBW(W:2700K,3000K,4000K,5000K)
- Input: 24V DC
- SDCM: 3 SDCM
- Bending radius: 60mm (minimum)
- Dimming: ON-OFF (Whole segment control)  
DMX512 8 segments per meter
- Product weight: About 0.6kg/m, excluding packaging

**Order Model**

Model	LED	Length	Size	Dimming	CCT	Power Feed	IP	Finish
						Type		
<b>AFLSV</b> V-series side bend neon light strip	<b>14</b> 14W/m <b>18</b> 18W/m	<b>10</b> 1m	<b>B</b> 16*16mm	<b>E</b> ON-OFF (Whole segment control) <b>M</b> DMX512 8 segments per meter	<b>27</b> 2700K	<b>S</b> Side <b>B</b> Bottom <b>F</b> Front	<b>5</b> IP65 <b>7</b> IP67	<b>WT</b> White
		<b>20</b> 2m			<b>30</b> 3000K			
		<b>30</b> 3m			<b>40</b> 4000K			
		<b>40</b> 4m			<b>50</b> 5000K			
		<b>50</b> 5m			<b>F2</b> RGBW(2700K) <b>F3</b> RGBW(3000K) <b>F4</b> RGBW(4000K) <b>F5</b> RGBW(5000K)			

**NEON - MODEL: AFLSV**  
 Linear Luminaires

WAC ARCHITECTURAL


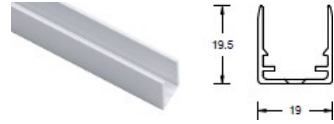
PROJECT:

TYPE:

Example: AFLSV-1410BE30S5WT

**NOTE:** The length can be provided in units of 0.1 meters, for example: AFLSV-1415BE30S5WT ("15" represents 1.5 meters)

**Accessories**

Part Number	Description	Picture
AFLSH-B-AC	H-series 16 * 16mm Special Card * Default 1M comes with 3pcs of cards	
AFLSH-B-CH	H-series 16 * 16mm dedicated fixed track length 965mm * Optional, needs to be ordered separately	

# NEON - MODEL: AFLSV


## Linear Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

### Product Image

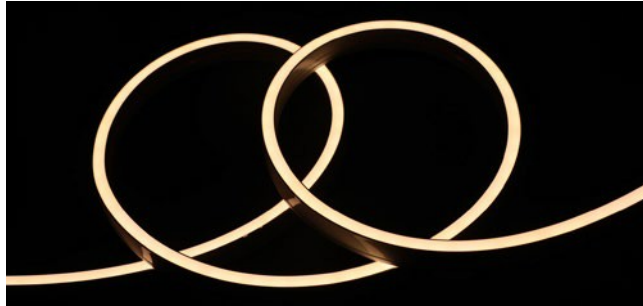

### Line Drawing

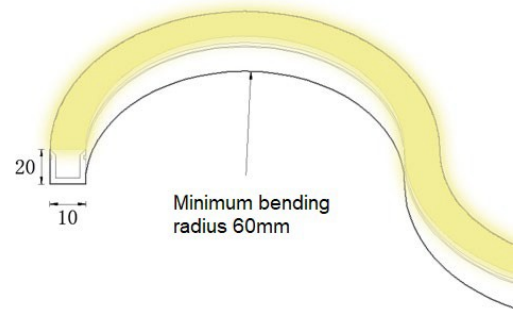

### Product Description

The 10 \* 20 mm side bend neon light strip adopts a special process of integrated extrusion, there are monochrome and RGBW versions available, ensuring continuous and uniform light output without any spots. The integrated end is injection molded and supports seamless splicing without dark areas. There are two specifications, IP65 and IP67, Widely used in indoor and outdoor contouring and shaping.

### Product Features

- Body Material: Integrated extruded silicone lamp body, high-quality FPCB lamp board
- Optical System: Silicone microstructure
- Accessories: Installation accessories can be ordered separately
- Certification: CQC
- IP Rating: IP65(Bare wires at both ends)  
IP67(Waterproof joints at both ends)
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

### Product Specifications

- LED Type: SMD
- Light power: 1610lm@14w/m, 2070lm@18W/m
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K,3000K,3500K,4000K,5000K/Ra90  
RGBW(W:2700K,3000K,4000K,5000K)
- Input: 24V DC
- SDCM: 3 SDCM
- Bending radius: 60mm (minimum)
- Dimming: ON-OFF (Whole segment control)  
DMX512 8 segments per meter
- Product weight: About 0.57kg/m, excluding packaging

### Order Model

Model	LED	Length	Size	Dimming	CCT	Power Feed	IP	Finish
<b>AFLSV</b> V-series side bend neon light strip	<b>14</b> 14W/m <b>18</b> 18W/m	<b>10</b> 1m	<b>C</b> 10*20mm	<b>E</b> ON-OFF (Whole segment control) <b>M</b> DMX512 8 segments per meter	<b>27</b> 2700K	<b>S</b> Side <b>B</b> Bottom <b>F</b> Front	<b>5</b> IP65 <b>7</b> IP67	<b>WT</b> White
		<b>20</b> 2m			<b>30</b> 3000K			
		<b>30</b> 3m			<b>40</b> 4000K			
		<b>40</b> 4m			<b>50</b> 5000K			
		<b>50</b> 5m			<b>F2</b> RGBW(2700K) <b>F3</b> RGBW(3000K) <b>F4</b> RGBW(4000K) <b>F5</b> RGBW(5000K)			

**NEON - MODEL: AFLSV**  
 Linear Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

Example: AFLSV-1410CE30S5WT

**NOTE:** The length can be provided in units of 0.1 meters, for example: AFLSV-1415CE30S5WT ("15" represents 1.5 meters)

**Accessories**

Part Number	Description	Picture
AFLSH-C-AC	V-series 10 * 20mm Special Card * Default 1M comes with 3pcs of cards	
AFLSH-C-CH	V-series 10 * 20mm dedicated fixed track length 965mm * Optional, needs to be ordered separately	