

VOLO - MODEL: AOC1M

Linear Luminaires



WAC ARCHITECTURAL

Project Name:

Type:

Product Image

Line Drawing

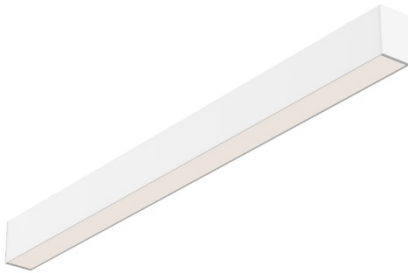

Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 2.2Kg, excluding packaging

Order Model

Model	Length (mm)	Power (mm)	Driver	Beam	CCT	Finish
AOC1M	12 1200	35 35W	E ON-OFF	P (Matte Cover)	30 3000K	WT White
			D 0-10V Dimming	Y (Prism Cover)	35 3500K	BK Black
			A DALI		40 4000K	
					50 5000K	

Example: AOC1M-1235E-Y40WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

VOLO - MODEL: AOC1M

Linear Luminaires


WAC ARCHITECTURAL

Project Name:

Type:

Product Image

Line Drawing



Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Lens + SUBROSA Invisible Optical System
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** 38°
- **LED Type:** High Power LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 2.2Kg, excluding packaging

Order Model

Model	Length (mm)	Power (mm)	Driver	Beam	CCT	Finish
AOC1M	12 1205	35 35W	E ON-OFF	2 24°	30 3000K	WT White
			D 0-10V Dimming	3 36°	35 3500K	BK Black
			A DALI	4 45°	40 4000K	
				50 5000K		

Example: AOC1M-1235E-240WT

WAC Lighting
www.wacighting.com (US)
www.wacighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12