

Volta

Static White - 4.5" Trimless New Construction Housings

R4RNL | R4SNL | R4RCL | R4SCL

Fixture Type: _____

Project: _____

Catalog#: _____



Location: _____



LINE DRAWING

Round

Square

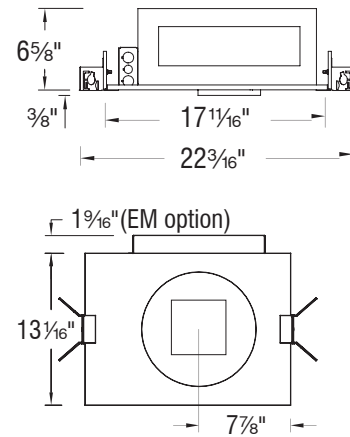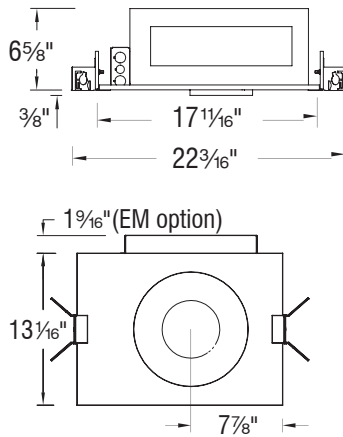

PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications.

SPECIFICATIONS

- Mounting:** Universal mounting brackets and hanger bars
 Ceiling cut out (Round): Trim \varnothing 5 1/8" \bigcirc
 Ceiling cut out (Square): Trim 5 1/8" x 5 1/8" \square
 Accommodates 1/2" - 1 1/2" ceiling thickness
- Input:** Universal 120-277V AC, 50/60 Hz
- Dimming:** 0-10V: 100-0%
 Electronic Low Voltage (ELV): 100-5%
- Emergency:** EM fixtures provided with integral Emergency battery back up with 24" lead wire remote test switch. Provides at least 90 minutes of 8W illumination during emergency operation
- Standards:** ETL & cETL, Chicago Plenum, IC-rated, Airtight (see list)
- Warranty:** 5 year WAC Lighting guaranteed warranty

Volta

Static White - 4.5" Trimless New Construction Housings

R4RNL | R4SNL | R4RCL | R4SCL

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

ORDERING INFORMATION

HOUSINGS (Required)								
	Model	Trim	Power	S	N,F,W	Rating	Driver	Emergency Backup
New Construction Airtight	R4RN (Round) R4SN (Square)	L <i>Trimless</i>	15	<i>10W</i>	<i>15W</i>	<i>IC</i>	DEFAULT <i>ELV, 0-10V</i>	EM
			25	<i>15W</i>	<i>23W</i>	<i>IC</i>		
			36	<i>22W</i>	<i>34W</i>	<i>Non-IC</i>		
New Construction Airtight Chicago Plenum	R4RC (Round) R4SC (Square)	L <i>Trimless</i>	15	<i>10W</i>	<i>15W</i>	<i>IC</i>	DEFAULT <i>ELV, 0-10V</i>	EM
			25	<i>15W</i>	<i>23W</i>	<i>IC</i>		
			36	<i>22W</i>	<i>34W</i>	<i>Non-IC</i>		

Field Replaceable Driver (New Construction Only)	
D-R4N-15	<i>Driver for 15W</i>
D-R4N-25	<i>Driver for 23W</i>
D-R4N-36	<i>Driver for 34W</i>

INSTALLATION

Trim Model	Trim Description	Ceiling Thickness		
		1/2"	1"	1 1/2"
R4RD2L R4SD2L	<i>Downlight</i>	Yes	Yes	Yes
R4RD1L R4SD1L	<i>Shallow Regressed Downlight</i>	Yes	Yes	Yes
R4RAL R4SAL	<i>Adjustable</i>	<i>Yes, to 45°</i>	<i>Yes, to 45°</i>	<i>Yes, to 35°</i>
R4RWL R4SWL	<i>Wall Wash</i>	Yes	Yes	No