

VOLO- MODEL: AOP1SS


Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image

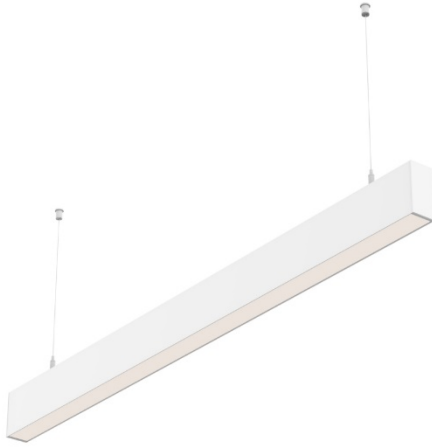

Line Drawing

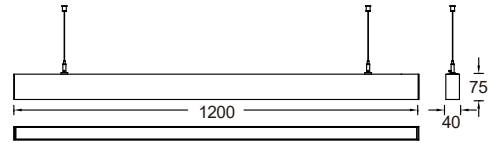

Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.8Kg, excluding packaging

Order Model

Model	Comment	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOP1S	S Single Directional Downward illuminated	12 1200	30 30W	E On-Off	P (Matte Cover)	30 3000K	WT White
				D 0-10V Dimming	Y (Prism Cover)	35 3500K	BK Black
				A DALI		40 4000K	
						50 5000K	

Example: AOP1SS-1230E-P30WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12

VOLO- MODEL: AOP1SS


Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image

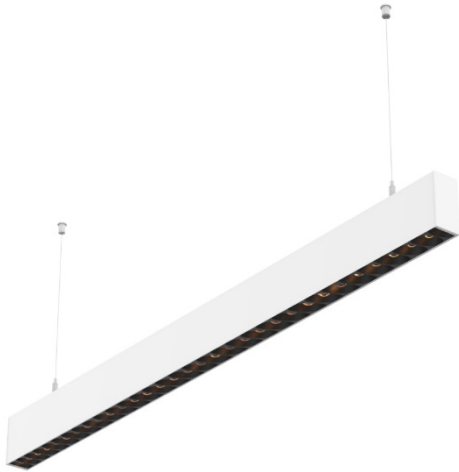

Line Drawing

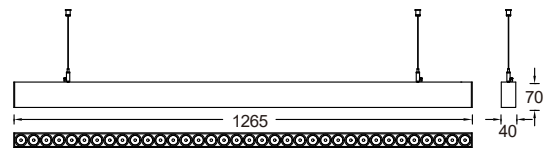

Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.8Kg, excluding packaging

Order Model

Model	Comment	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOP1S	S Single Directional Downward-illuminated	12 1265	30 30W	E On-Off	2 24°	30 3000K	WT White
				D 0-10V Dimming	3 36°	35 3500K	BK Black
				A DALI	4 45°	40 4000K	
					50 5000K		

Example: AOP1SS-1230E-230WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12

VOLO- MODEL: AOP1SD


Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image

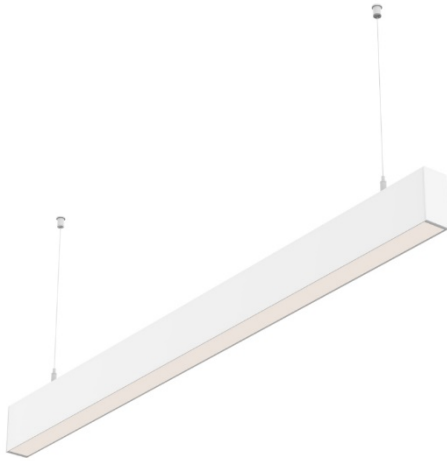

Line Drawing

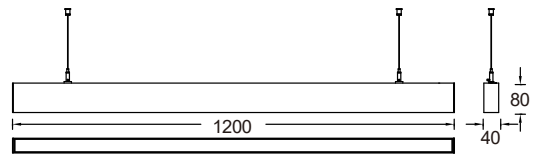

Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** / /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.8Kg, excluding packaging

Order Model

Model	Comment	Length (mm)	Power (W)	Driver	Beam Up	Beam Down	CCT	Finish
AOP1S	D Double Directional Two-sided illuminated	12 1200	40 30W downward-illuminated +10W Upward-illuminated	E ON-OFF D 0-10V Dimming A DALI	F Frosted	P (Matte)	30 3000K	WT White
						Y (Prism)	35 3500K	BK Black
							40 4000K	
							50 5000K	

Example: AOP1SD-1240EFY40WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

VOLO- MODEL: AOP1SD

Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image



Line Drawing

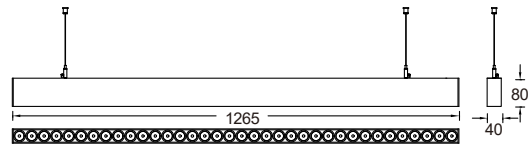

Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.8Kg, excluding packaging

Order Model

Model	Comment	Length (mm)	Power (W)	Driver	Beam Up	Beam Down	CCT	Finish	
AOP1S	D Double Directional	12 1265	40 30W downward-illuminated +10W Upward-illuminated	E ON-OFF D 0-10V Dimming A DALI	F Frosted	2	24°	30 3000K	WT White BK Black
						3	36°	35 3500K	
	4					45°	40 4000K		
	50					5000K			

Example: AOP1SD-1240EF340WT